



COMPOUND PLAN KEYED NOTES:

- REMOVE EXISTING LAWN SOD TO 2 FT BEYOND THE EDGE OF THE NEW CONCRETE SLAB AND REMOVE EXISTING SOIL WITHIN THE SLAB PERIMETER TO DEPTH THAT WILL ACCOMMODATE SLAB & COMPACTED BASE. REFER TO NOTE 2. SLOPE SLAB @ 1% TO THE WEST
- PROVIDE 4" OF COMPACTED GRANULAR BASE AND PLACE 16'-O" x 28'-O" x 6" THICK CONC. SLAB. PROVIDE #4 BARS EA WAY @ 16" O.C. CONCRETE TO BE 4000 PSI MIX. TOP OF SLAB TO BE 4" BELOW EXISTING COURTYARD SLAB. UTILIZE SUPPORT CHAIRS TO ENSURE REBAR PLACEMENT IN NEW SLAB.
- 3) CONTRACTOR TO MODIFY / RELOCATE EXISTING LAWN SPRINKLER PIPING & HEADS AS REQUIRED TO ACCOMMODATE NEW CHILLER COMPOUND. A PRE-EXCAVATION CONFERENCE WITH THE ISU PROJECT MANAGER AND GROUNDS SUPERINTENDENT IS REQUIRED.
- PROVIDE 8' HIGH CHAIN LINK FENCE W/
 VERTICAL SLATS END & CORNER POSTS TO BE
 4" DIA. & LINE POSTS TO BE 2 3/8" DIA.
 PROVIDE 1 5/8 DIA. TOP RAIL & TENSION WIRE
 NEAR BOTTOM OF FABRIC. KNUCKLE SELVAGE
 AT TOP & BOTTOM OF FABRIC.
- 5 PROVIDE 3 FT WIDE HINGED GATE WITH LATCH & PADLOCK HASP.
- 6 PROVIDE TOOLED CONTROL JOINTS @ 4 EQ. SPACES N/S & 2 EQ SPACES E/W.
- 7) PROVIDE 1/2" EXPANSION MATERIAL BETWEEN NEW SLAB & EXISTING COURTYARD FOUNDATION.
- 8 EXISTING TREE TO BE RELOCATED WITH TREE SPADE BY CONTRACTOR AT THE DIRECTION OF ISU GROUNDS.
- GONTRACTOR TO PREPARE PERIMETER AREA & REPLACE SOD AS NEEDED INCLUDING ANY AREAS DAMAGED DUE TO CONSTRUCTION ACTIVITIES.
- 10) INFILL (E) HOLE @ CONC. DECK REFER TO DETAIL 4/A1.



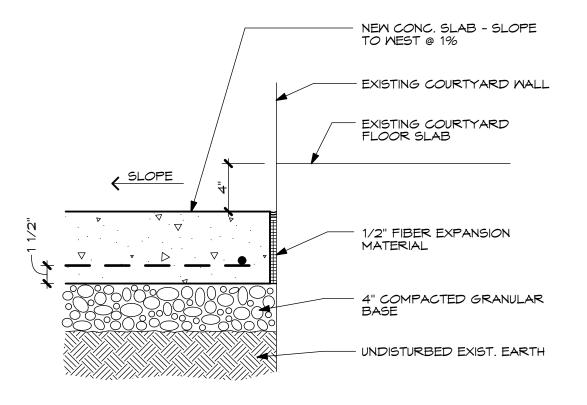

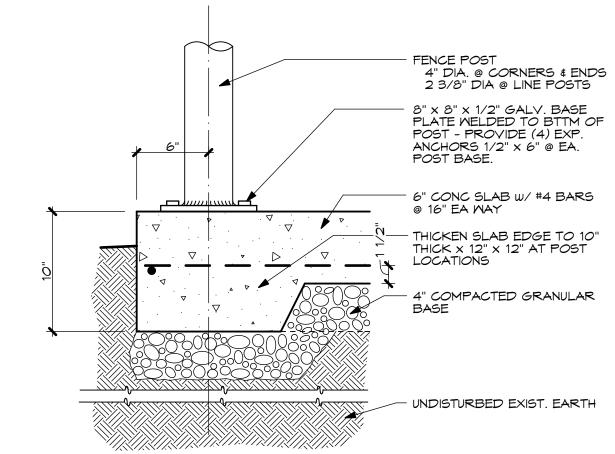

EDGE OF SLAB


8" × 8" × 1/2" GALV. BASE
PLATE WELDED TO BITM OF
POST - PROVIDE (4) EXP.
ANCHORS 1/2" × 6" @ EA.
POST BASE.

4" CORNER POST OR
2 3/8" LINE POST


BASE PLATE

2 EDGE OF SLAB DETAIL

1-1/2" = 1'-0"

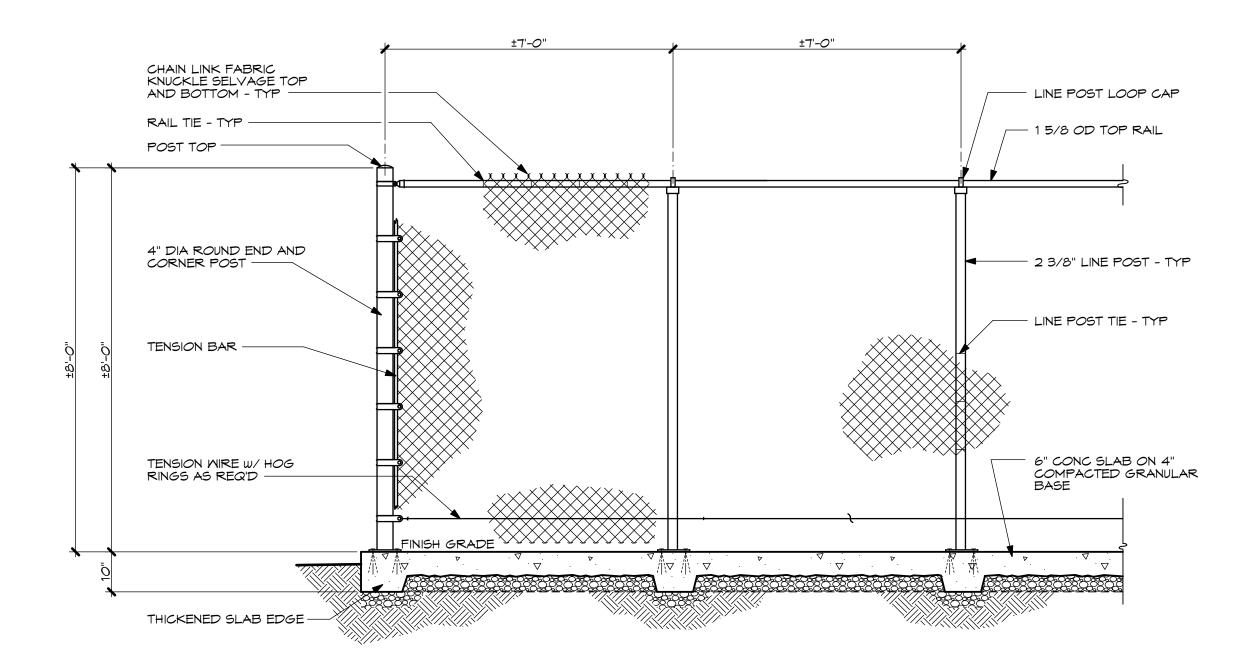

3 CHAIN LINK FENCE DETAIL

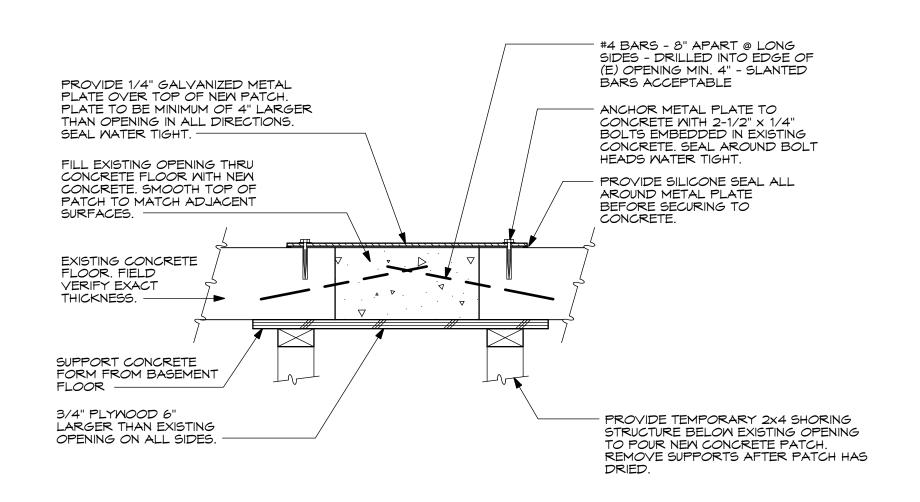

4 CONCRETE FLOOR PATCH DETAIL

NO SCALE



DRWN. BY: CKD. BY:
CH RH

JOB NO. DATE:
17059 FEB. 2018

1 3

ate

SSOCI

ystem

ngineered

X

(2)

IDAHO

23 - CHILLER REPLACEME JARTS BUILDIN RSITY POCATELL

DPW

SHEET: A1

OF: FIVE